


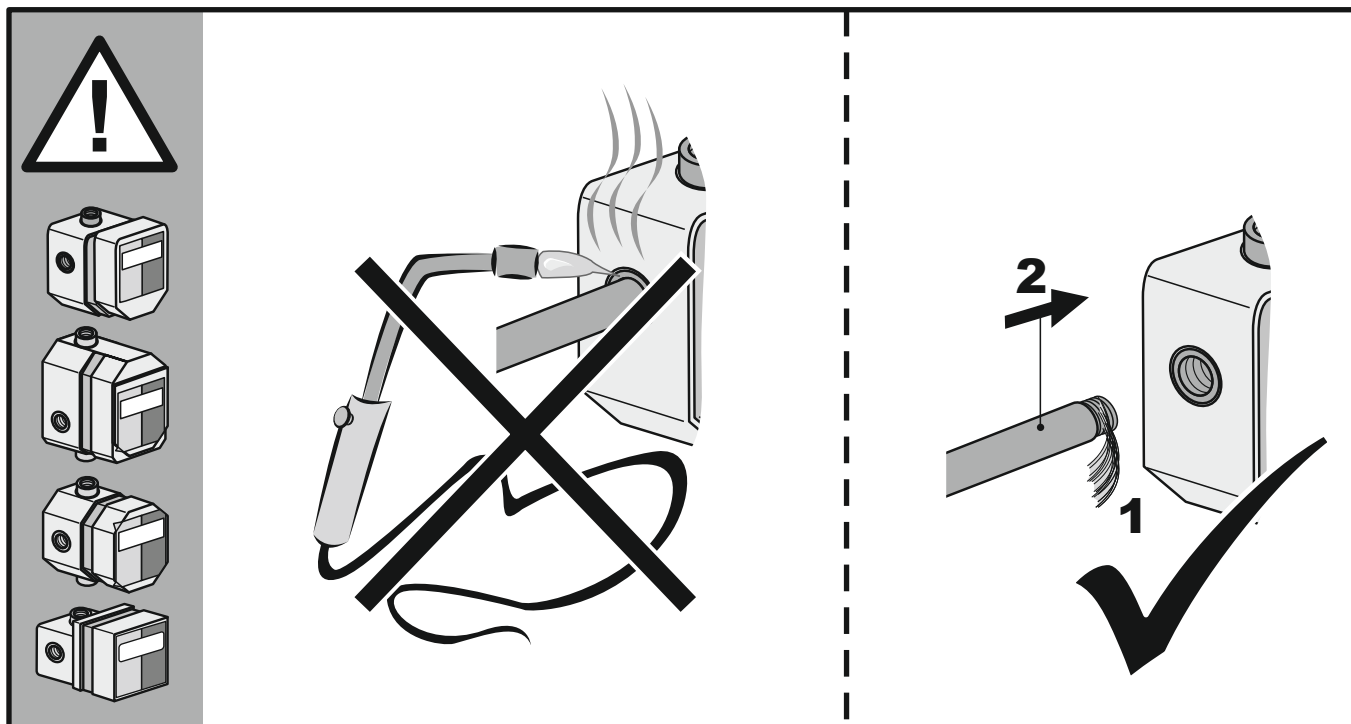

**DIN EN 806  
DIN EN 1717  
DIN 1988**

**Global Standards**

**www.kludi.com**

°C / °F

max. 70 °C / 158 °F

✓ 60 °C / 140 °F

min. 10 °C / 50 °F

✓ 3 bar / 43,5 psi

min. 1 bar / 14,5 psi


max. 10 bar / 145 psi

3 min.


max. 70 °C / 158 °F

**i** **www.kludi.com**


- (D)** Montage- und Bedienanleitung
- (CN)** 安裝及操作指南
- (CZ)** Návod k instalaci a k použití
- (E)** Instrucciones de montaje y de manejo
- (F)** Instructions de montage et mode d'emploi
- (GB)** Installation and operating instructions
- (GR)** ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
- (H)** Szerelési és használati utasítás
- (I)** Istruzioni di montaggio e per l'uso
- (NL)** Montagehandleiding en Gebruiksaanwijzing
- (PL)** Instrukcja montażu i obsługi
- (RO)** Instrucțiuni de montaj și utilizare
- (RU)** Руководство по монтажу и эксплуатации
- (SK)** Návod na montáž a obsluhu

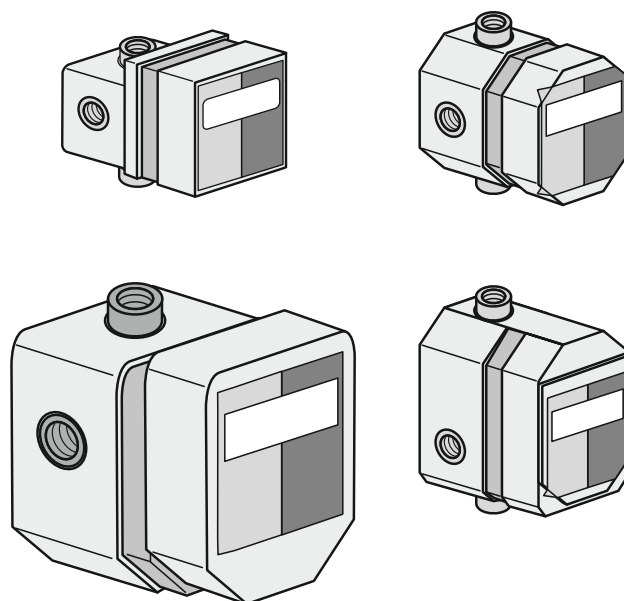


1.

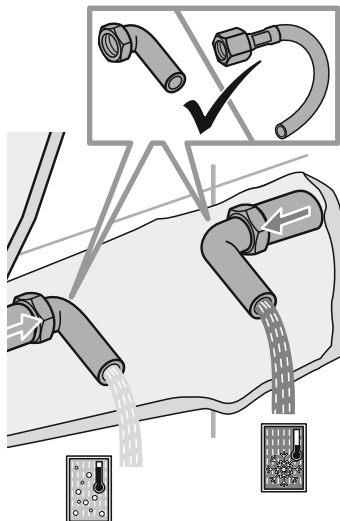


| A         |
|-----------|
| 33 424    |
| 70-105 mm |
| 33 434    |
| 70-95 mm  |
| 35 424    |
| 70-90 mm  |
| 38 620    |
| 75-105 mm |
| 38 826    |
| 68-88 mm  |
| 38 624    |
| 75-92 mm  |
| 33 464    |
| 85-110 mm |




2a.

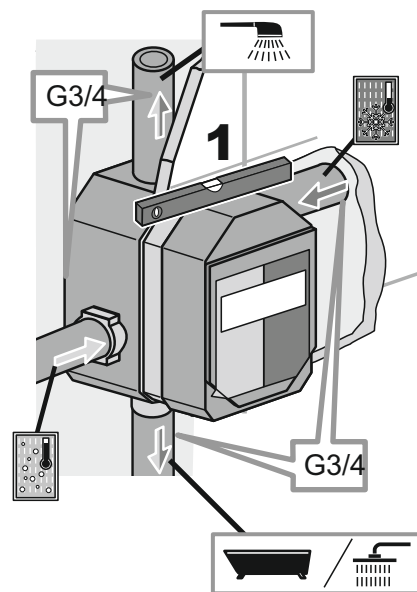



2b.

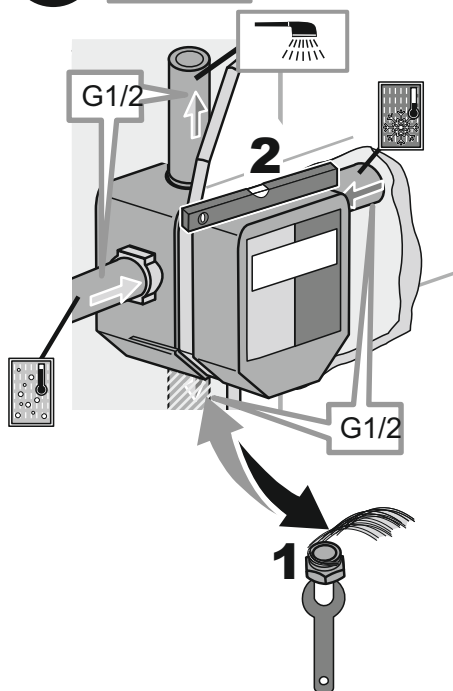


2c.

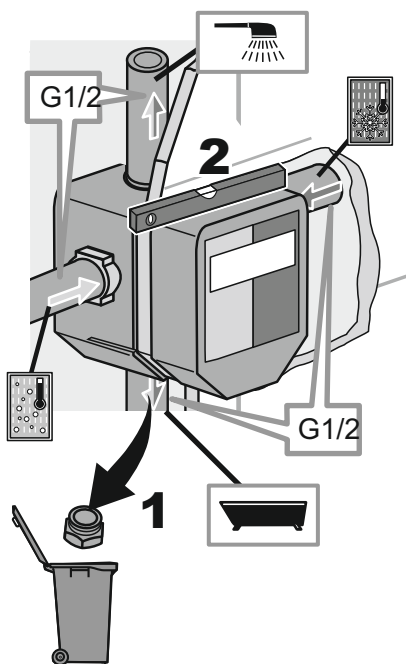

2c.

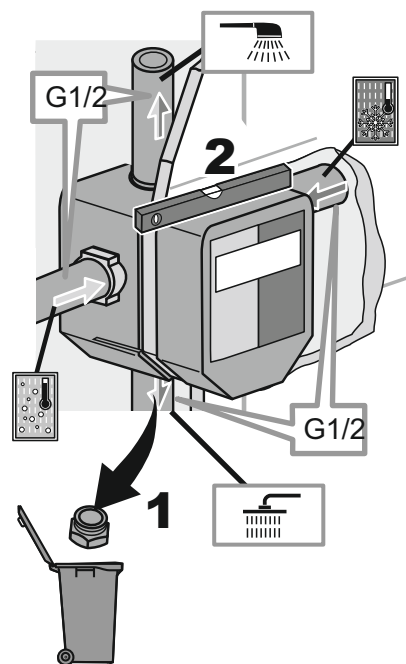

i

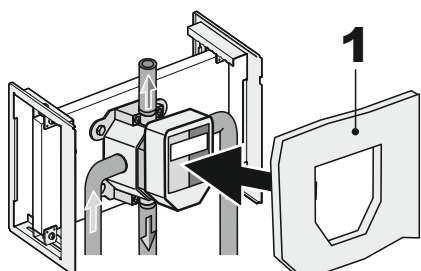

i

