



Dornbracht AQUAMOON Installation Guide

Installation examples for
Dornbracht RAINMOON,
AQUAMOON and
AQUAMOON EMBRACE



overview



RAINMOON

41 610 979 + 35 610 970 90 - White light

41 615 979 + 35 615 970 90 - Color light (Zigbee)



AQUAMOON

41 620 979 + 35 620 970 90 - White light

41 625 979 + 35 625 970 90 - Color light (Zigbee)



AQUAMOON EMBRACE

41 630 979 + 35 630 970 90 - Color light (Zigbee)

Important : All items are only fully functional in the combination described above !

Note: All dimensions are based on the assumption of a 1.75 m tall user.
They can be varied and adapted to other body sizes if required.


You will find further inspiration at dornbracht.com.

RAINMOON



Concealed articles

POS.	QTY.	item number	Description
10	1x	35 615 970 90	RAINMOON Concealed rain panel
20	1x	35 085 970 90	Concealed wall elbow
30	1x	35 428 970 90	Concealed thermostat with built-in isolators
40	1x	12 360 970 90	xGRID Installation track 555 mm

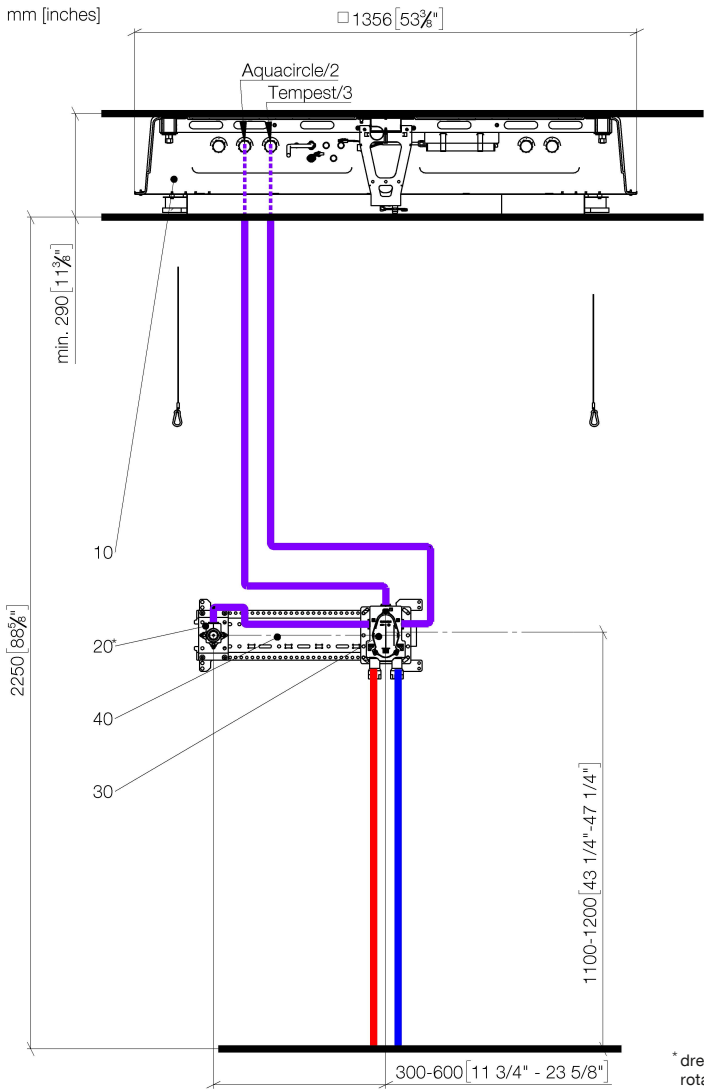

* drehbar auf Montageplatte /
rotatable on mounting plate

Operating conditions

Cold water temperature: 5 – 25 °C
Hot water temperature: 55 – 65 °C
Recommended hot water temperature 60 °C
Permissible flow pressure 1,5 – 4 bar
Recommended flow pressure 3 bar

No outlet can be used simultaneously in this combination !


RAINMOON



Exposed trim parts

POS.	QTY.	item number	Description
10	1x	41 615 979	RAINMOON Rain panel
20	1x	27 802 892	Hand shower set with individual rosettes
30	1x	36 427 970	Concealed thermostat with three function volume control

mm [inches]

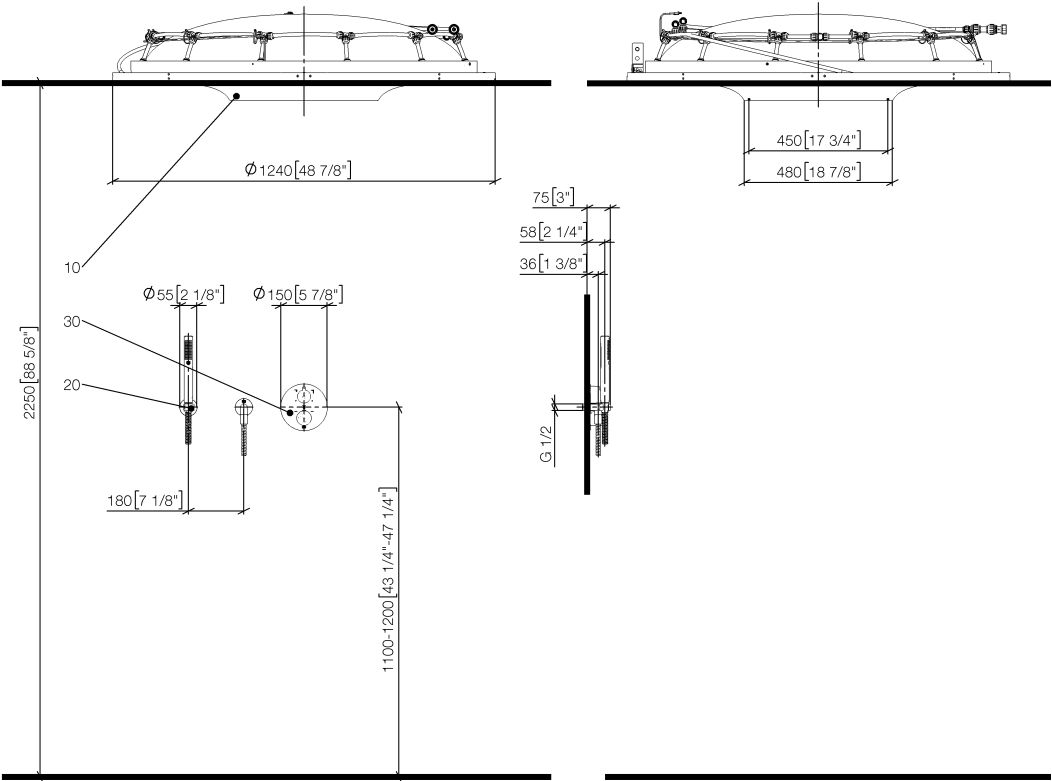

Maximum flow rate (3 bar/43,5 Psi):


Aquacircle: 6,8 l/min ~ 1.5 gpm

Tempest: 5 l/min ~ 1 gpm

Hand shower: 15 l/min ~ 3.3 gpm

No outlet can be used simultaneously in this combination !

POS.	QTY.	item number	Description
10	1x	35 625 970 90	AQUAMOON Concealed rain panel
20	1x	35 531 970 90	xTOOL Concealed thermostat module with 3 valves 3/4"
30	1x	35 085 970 90	Concealed wall elbow
40	1x	35 607 970 90	Wall valve 1/2"
50	3x	12 360 970 90	xGRID Installation track 555 mm

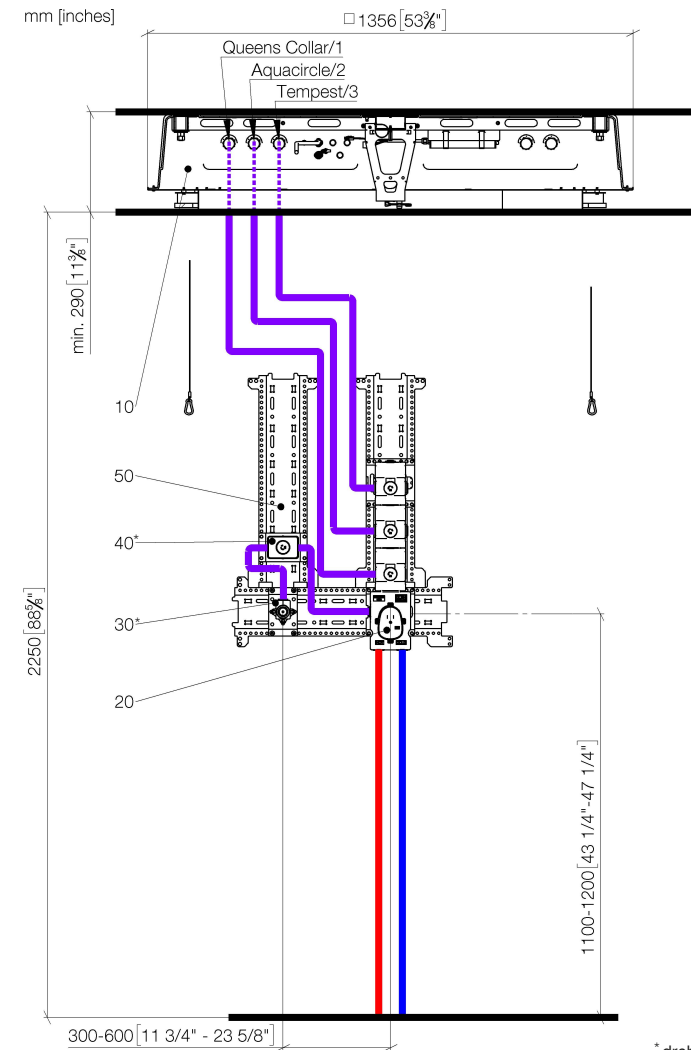

* drehbar auf Montageplatte /
rotatable on mounting plate

Cold water temperature: 5 – 25 °C
Hot water temperature: 55 – 65 °C
Recommended hot water temperature 60 °C
Permissible flow pressure 1,5 – 4 bar
Recommended flow pressure 3 bar


all outlets can be used simultaneously !



Exposed trim parts

POS.	QTY.	item number	Description
10	1x	41 625 979	AQUAMOON Rain panel
20	1x	27 802 892	Hand shower set with individual rosettes
30	1x	36 503 979	xTOOL Concealed thermostat without volume control 3/4"
40	4x	36 607 740	Wall valve clockwise closing 1/2"

mm [inches]

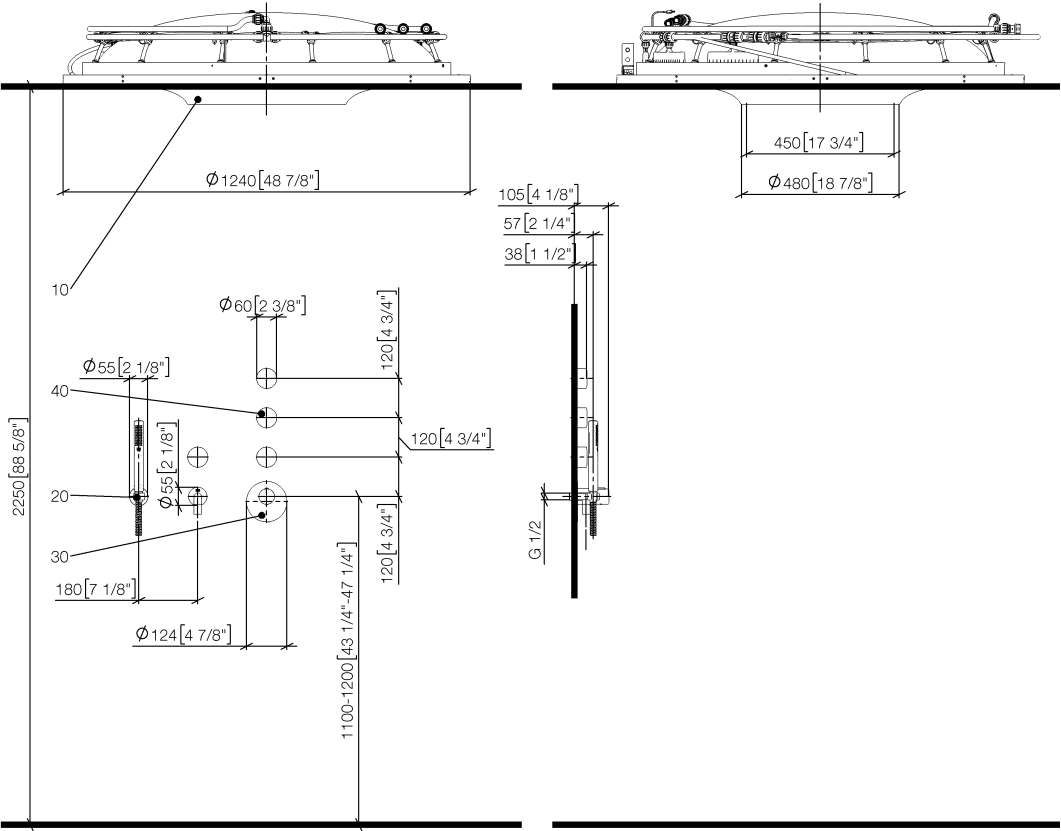

Maximum flow rate (3 bar/43,5 Psi):

Aquacircle: 12 l/min ~ 2.6 gpm

Tempest: 10 l/min ~ 2.2 gpm

Queen's Collar: 24 l/min ~ 5.3 gpm

Hand shower: 15 l/min ~ 3.3 gpm


all outlets can be used simultaneously !

AQUAMOON EMBRACE



Concealed articles

POS.	QTY.	item number	Description
10	1x	35 630 970 90	AQUAMOON EMBRACE Concealed rain panel
20	1x	35 531 970 90	xTOOL Concealed thermostat module with 3 valves 3/4"
30	1x	35 503 970 90	xTOOL Concealed thermostat module without volume control 3/4"
40	1x	35 608 970 90	Wall valve 3/4"
50	1x	35 085 970 90	Concealed wall elbow
60	4x	12 360 970 90	xGRID Installation track 555 mm

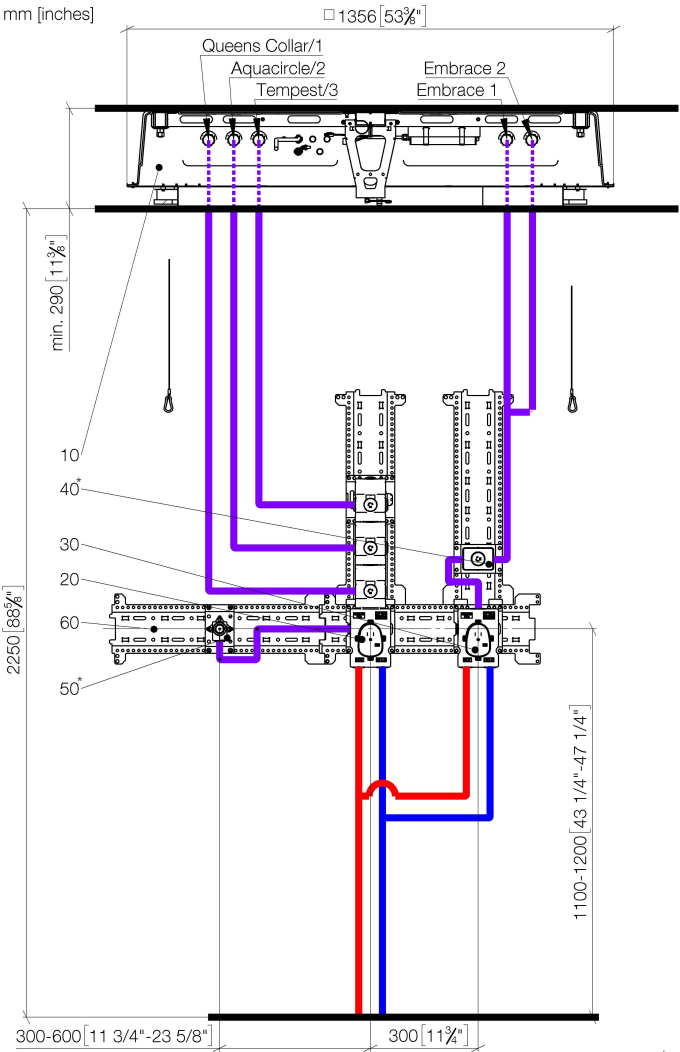

* drehbar auf Montageplatte /
rotatable on mounting plate

Operating conditions

Cold water temperature: 5 – 25 °C
Hot water temperature: 55 – 65 °C
Recommended hot water temperature 60 °C
Permissible flow pressure 2 – 5 bar
Recommended flow pressure 3 bar


all outlets can be used simultaneously !

AQUAMOON EMBRACE



Exposed trim parts

POS.	QTY.	item number	Description
10	1x	41 630 979	AQUAMOON EMBRACE Rain panel
20	1x	27 809 980	Hand shower set with individual rosettes with volume control
30	2x	36 503 985	xTOOL Concealed thermostat without volume control 3/4"
40	3x	36 607 985	Wall valve anti-clockwise closing 1/2"
50	1x	36 608 985	Wall valve anti-clockwise closing 3/4"

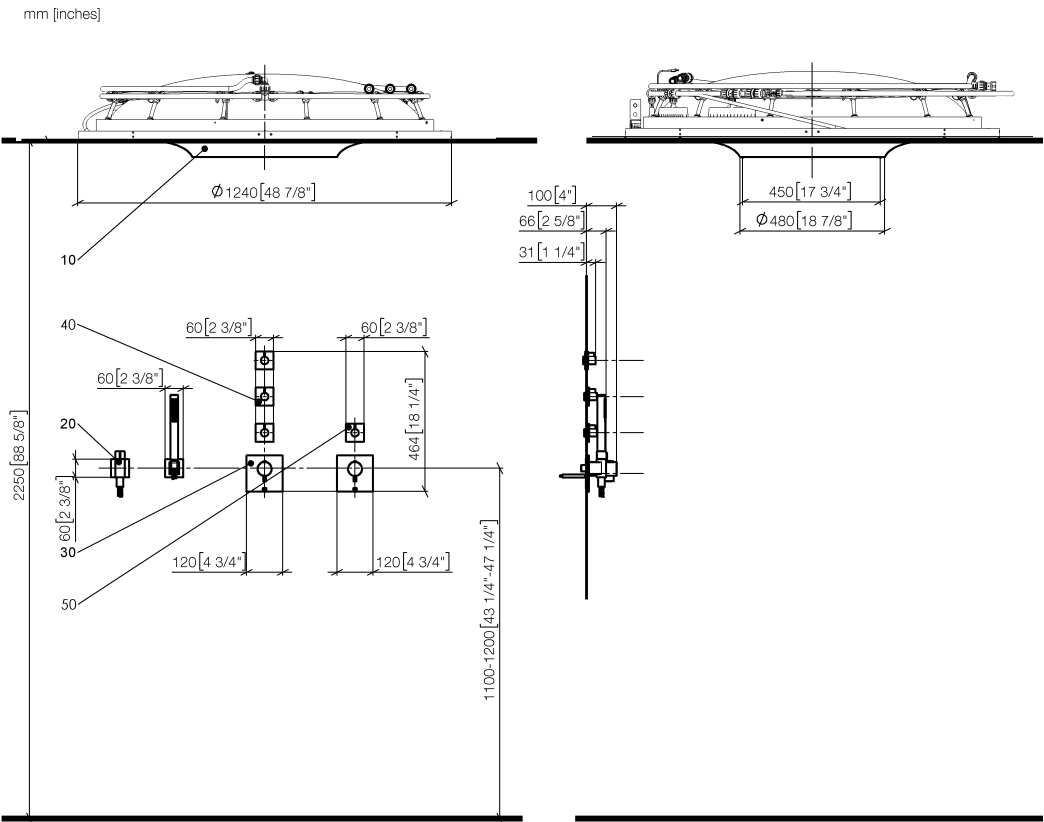

*Note: complete Embrace by opening Queen's Collar and Embrace valve at the same time.


Maximum flow rate (3 bar/43,5 Psi):

Aquacircle: 12 l/min ~ 2.6 gpm
Tempest: 10 l/min ~ 2.2 gpm
Queen's Collar: 24 l/min ~ 5.3 gpm
Embrace: 60 l/min ~ 13.2 gpm
Hand shower: 15 l/min ~ 3.3 gpm


all outlets can be used simultaneously !

xGrid for neat, concealed installation


The all-purpose installation track! Whatever combination of our concealed products you want, installation is fast, safe and above all, precise.

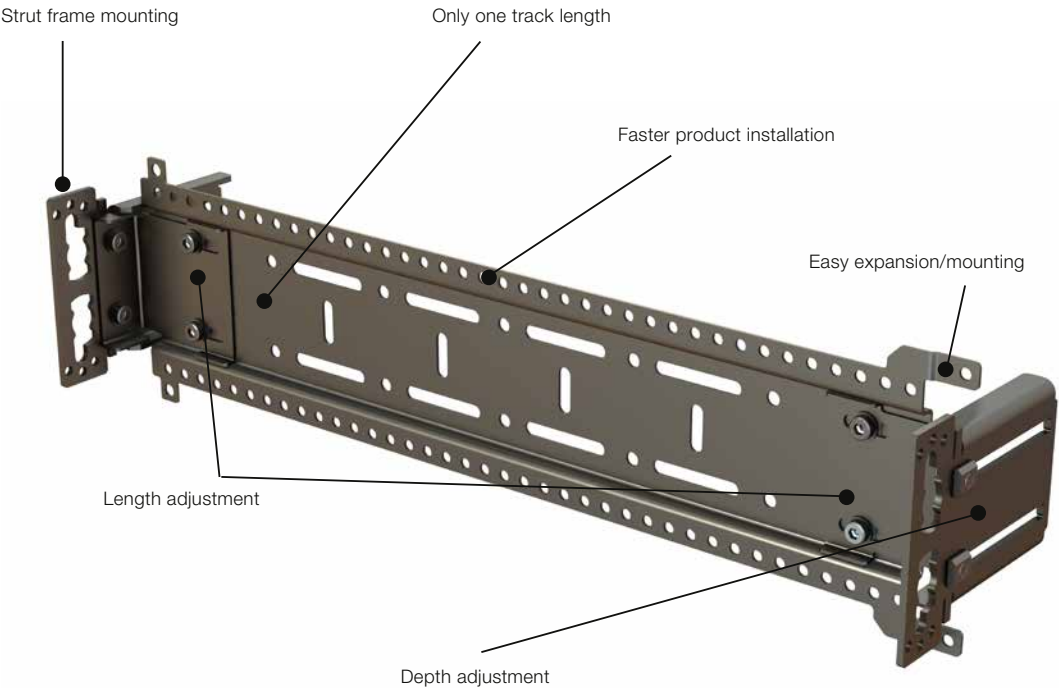

Planning example with an xGrid track

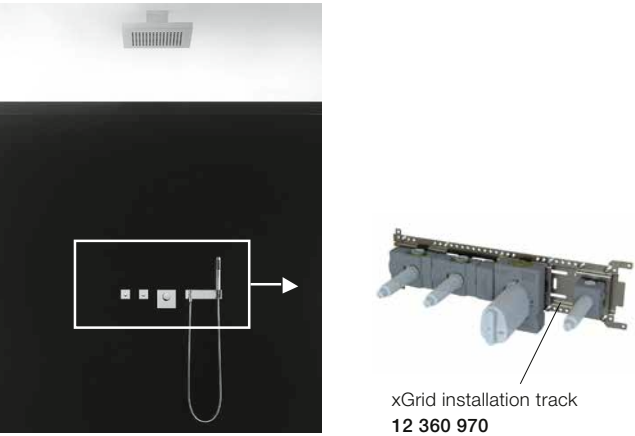

Planning example with an xGrid set of 3

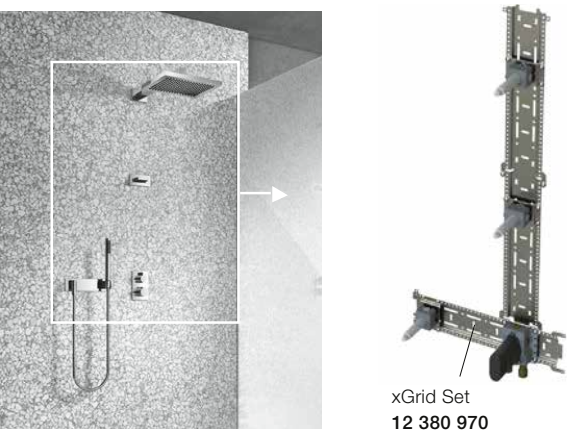

Planning information

Installation height

The basic installation height on the wall is 1200 mm for a 1.75 m tall user. This can be varied as required and adapted to the height of the particular user.

Hot water supply


For the optimum choice of hot water storage device – taking into consideration additional drawing-off points and the frequency of use – you need to assess the specific demand.

Shower drainage


For choosing drainage, taking into consideration the flow rate of all the products in the shower, you need to assess the specific demand.

Wall elbow arrangement

When using a complete hand shower set or the Kneipp hose with a cover plate, the wall elbow and holder arrangement is prescribed (to the right or left). Should you want a different arrangement, this can be implemented using the individual rosette versions.

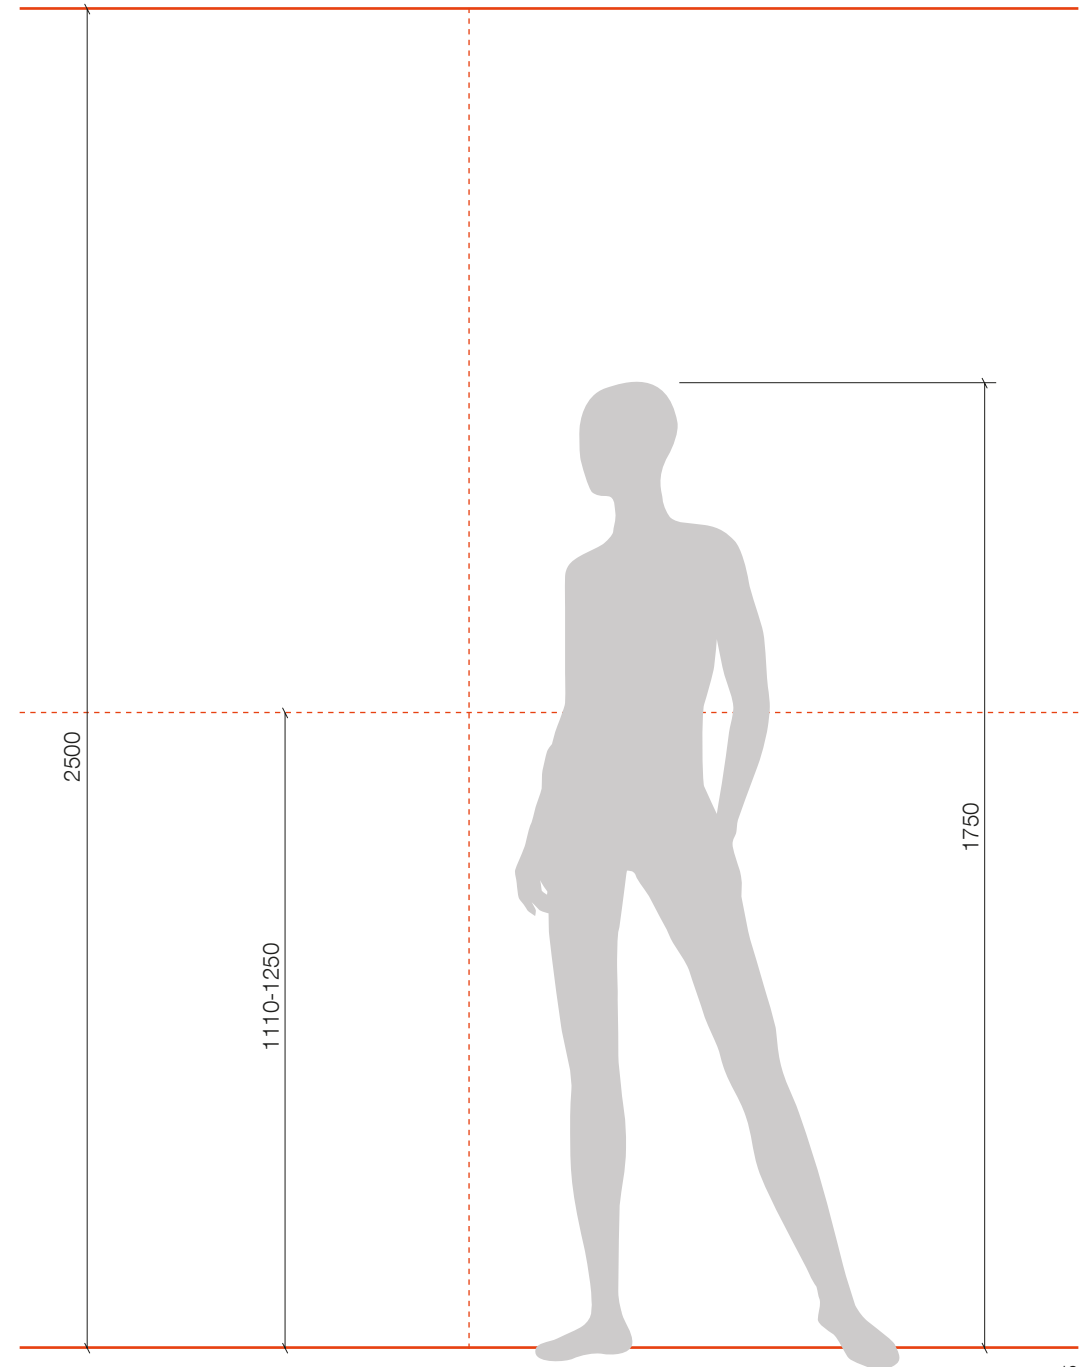

Further information, along with product information and technical data, can be found at dornbracht.com

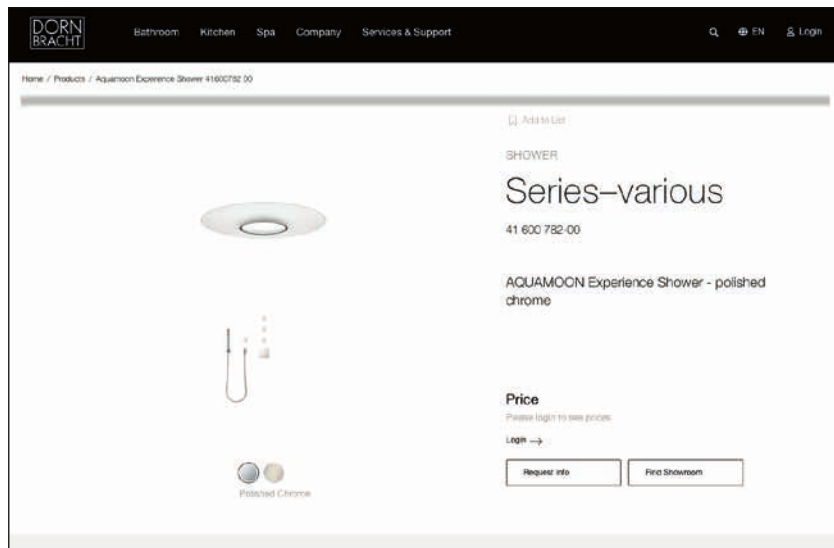

dornbracht.com



Dornbracht Price lists

Dornbracht AG & Co. KG
Köbbingser Mühle 6
D-58640 Iserlohn
mail@dornbracht.de
dornbracht.com