

Product: KLUDI BALANCE electronic controlled basin mixer
DN 15 ECO, with battery

Ref.: 5210005WR

Product description

electronic controlled basin mixer DN 15
single hole mounted
flow rate 1,9 l/min at 3 bar
aerator M 24 x 1
magnet-cartridge unit, with presettable temperature
control handle
optical object-registration
electronic unit with battery control device
6 V Lithium Battery CR-P2, anti theft
integrated back flow preventer
rapid installation set
flexible high pressure supply tubes G 3/8 with dirt catcher sieves

Finishes:
05 chrome

Product picture



Advertisement


Electronic controlled mixer, manufacturer KLUDI GmbH & Co KG

KLUDI BALANCE item no. 5210005WR

type: Electronic controlled basin mixer DN 15 / PN 10, chrome plated brass, electronic controlled pillar tap, according to technical requirements DIN EN 15091 and VDE 0630 part 12/09.88, electronic = electromagnetic compatibility proofed, flexible high pressure supply tubes 3/8 inch with metal body with DVGW / W270 approval, aerator M 24 x 1, control electronic with programming options, activation optoelectronic, with 6 V Lithium Battery CR-P2, safety class IP 65, with presettable temperature control handle, flow rate 1,9 l/min at 3 bar, max. warm water intake temperature 65 °C (as scald protection), with activatable/deactivatable 24 h automatic flush, with functional reliability magnet-cartridge unit, with integrated sensory window, valve closed in rest position, with back flow preventer, rapid installation system, with adjustable water run-time (0,1 – 5 sec.), with 2 minutes short-off function, with (set/free adjustable) hot water safety device via mixing shaft, (but if static pressure greater than > 5 bar install a pressure reducer), (the Battery is for anti-theft device internal the fitting, but still easy to maintain)

dimensions: height: 129,5 mm, nozzle height: 106 mm, projection: 129 mm

Dimensional drawing

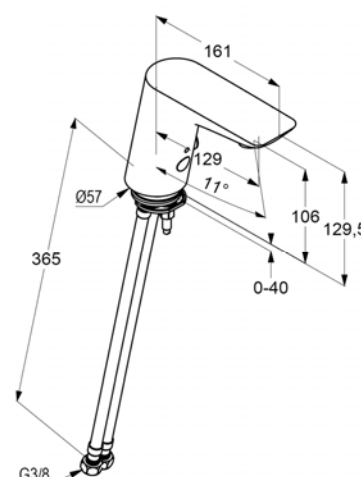

Flow rate diagram

