


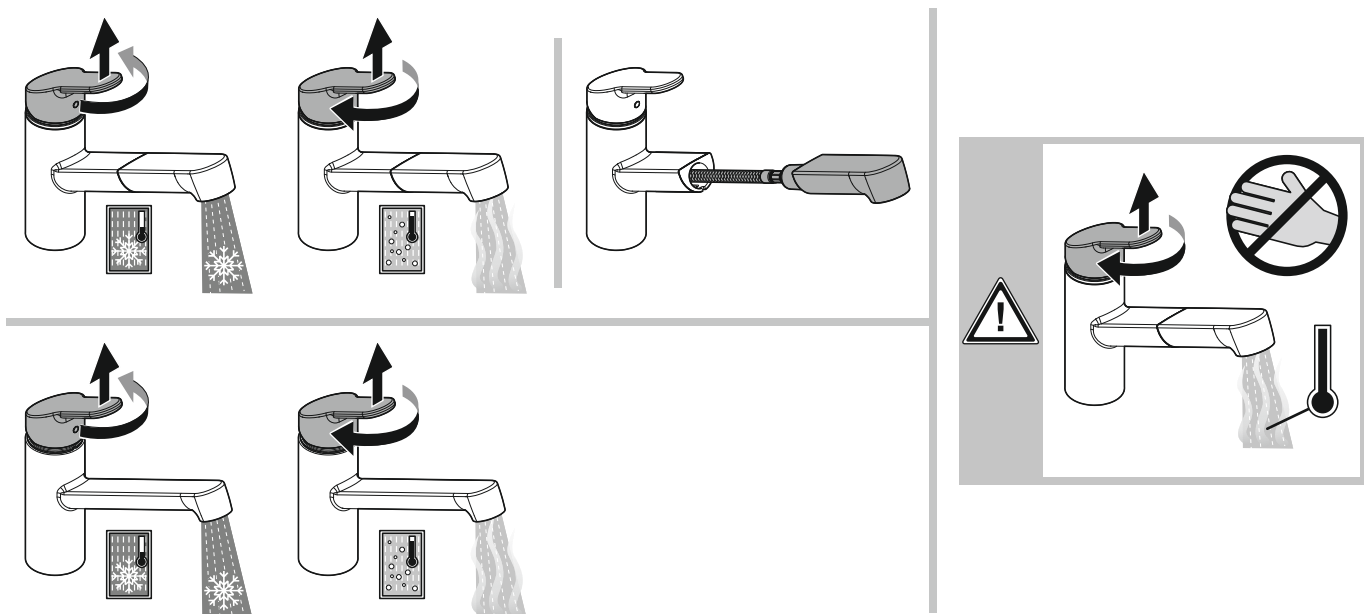

DIN EN 806
DIN EN 1717
DIN 1988
Global Standards

°C / °F

max. 70 °C / 158 °F

✓ 60 °C / 140 °F

min. 10 °C / 50 °F

✓ 3 bar / 43,5 psi


min. 1 bar / 14,5 psi

max. 10 bar / 145 psi

3 min.

max. 70 °C / 158 °F

- Ⓛ Montage- und Bedienanleitung
- Ⓒℕ 安裝及操作指南
- Ⓒℤ Návod k instalaci a k použití
- Ⓔ Instrucciones de montaje y de manejo
- Ⓔ⒮ Paigaldamine ja kasutamine
- Ⓕ Instructions de montage et d'utilisation
- Ⓖ⒮ Installation and operating instructions
- Ⓖ⒮ ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
- Ⓕ Szerelési és használati utasítás
- Ⓕ Istruzioni di montaggio e per l'uso
- Ⓕ Montavimo ir naudojimo instrukcija
- Ⓕ Montāžas un lietošanas instrukcija
- Ⓖ⒮ Montagehandleiding en Gebruiksaanwijzing
- Ⓖ⒮ Instrukcja montażu i obsługi
- Ⓕ Instrucțiuni de montaj și utilizare
- Ⓕ Руководство по монтажу и эксплуатации
- Ⓕ Návod na montáž a obsluhu
- Ⓕ Navodila za montažo in uporabo
- Ⓕ Інструкція по монтажу та експлуатації
- Ⓕ تعليمات التركيب والتشغيل

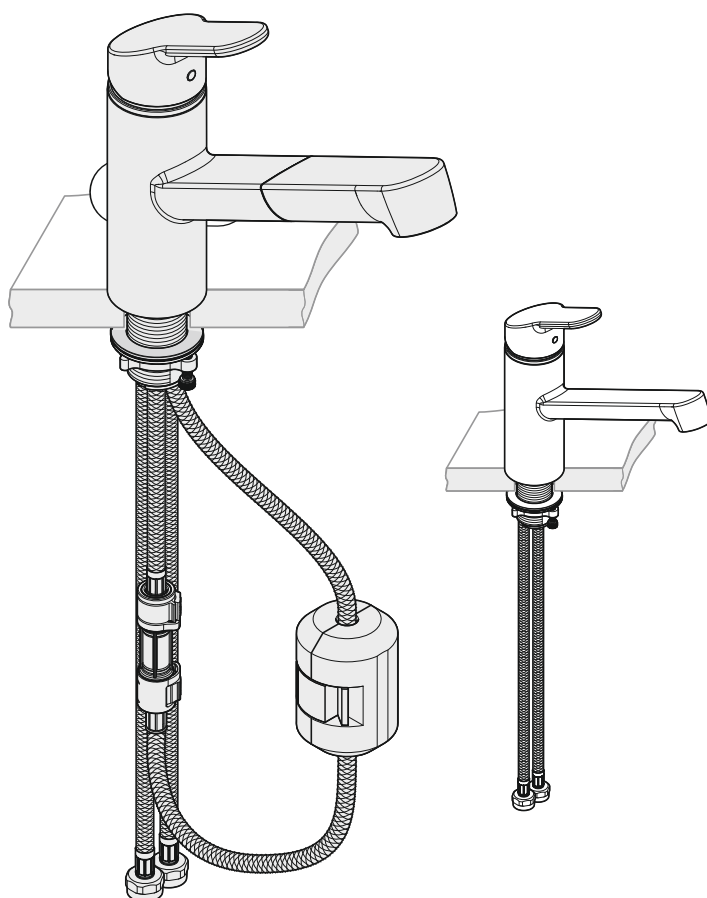

Kludi GmbH & Co. KG
Postfach 25 60
D-58685 Menden
Am Vogelsang 31-33
D-58706 Menden

Telefon: (D) +49 (0) 23 73 / 904-0
Telefax: (D) +49 (0) 23 73 / 904-4 65
E-Mail: info.de@kludi.com
Internet: www.kludi.com

KLUDI

